

SEALANT GUNS

Caulking Gun



Hand-operated steel gun is portable. Squeezing the trigger causes the plunger to apply pressure. GGG-C-120.

For use with bulk and cartridge compounds. Round, detachable discharge nozzle has 1/2" discharge. Has a closed barrel with a ratchet-type plunger rod. Gun capacity is 1 pt (30 cu in.). Holds 2 x 8-1/2" and 2 x 10" cartridges.

5120-00-293-3208

EA \$62.19




Half-barrel, cradle or drop-in type is for use with spouted cartridges. Holds 2 x 8-1/2" cartridges. Comes with a ratchet-type plunger rod. Discharge nozzle is not required.

5120-00-679-5655

EA \$3.70

Sealant Gun (Pneumatic)

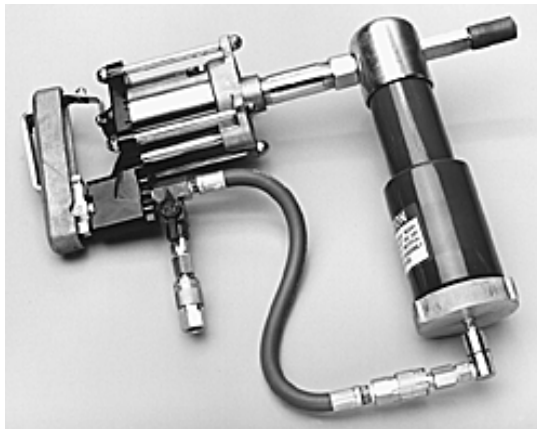

Air-operated tool is self-contained and hand held. Consists of air-actuating cylinder, 12-oz refillable sealant container, single-shot trigger and injection nozzle. Operates on 75 to 125 psi of air pressure. Comes with a manual. Grover P/N 223 or equal.

5130-00-345-1179

EA \$969.78

Air-operated gun is for dispensing sealant prepackaged in a Semco 6-oz polyethylene cartridge equipped with the Semco plugged wiper plunger. Gun cap is threaded to accept 1/8" pipe thread needle nozzle or zerk-type connector. Ram rod measures 3/16" in diameter. Has a 1 stroke with 0.027 cu in. of material for each stroke and a 40 to 1 pressure ratio. Semco Model 507-A, P/N SG221162EA or equal.

5130-00-677-7439

EA \$1140.58



Air-operated gun uses extrusion action to dispense aircraft sealant.

For use with sealant packaged in a 6-oz cartridge. Consists of gun, removable pistol-grip handle and cartridge retainer. Gun is trigger actuated and operates on 100 to 120 psi of air pressure. Capable of operation in a 4" hole. Measures 8" long. Furnished with instructions. Semco P/N 220847, Pyles P/N 950-60HA or equal.

5130-00-924-6396

EA \$55.16

SEALANT GUN NOZZLES

Sealant Gun Nozzle

Disposable, detachable, polyethylene nozzle is for use with hand-operated caulking guns. Reinforced with eight equally spaced, triangular, taper-shaped fins measuring 1/16" high and 1" long located 1/2" from attaching end. (for use with Caulking Gun Cartridge Assemblies 5120-00-670-3294 and 5120-00-670-3295 and Sealing Compound 8030-00-152-0022 and 8030-00-598-2910.)

Round-tapered nozzle is bent at 30 deg. Has 1/4" NPT external threads and a 1/8" diameter opening. Semco P/N 700001, Techcon Systems P/N TS618-30-2 or equal.

5120-00-167-0153

6" length

EA \$0.52

Spatula Set



Assembly of three fiberglass-filled nylon spatulas with two working ends each. Each measures 7-1/4" long. End widths are as follows: 3/8" and 9/32", 1/16" and 9/32" and 3/8" and 1/2". Comes with a case. Semco P/N 226244, Techcon Systems P/N TS1275-K or equal.

5120-00-056-3237

SE \$4.74